



C501



C505WS




C511

- **2 year warranty**
- **NEW** soft touch controls with bright LED display
- **NEW** Maidaid® colour scheme
- Model C511 standard with breaktank **WRAS approved**
- **NEW** internal water softener model **C505WS** with regeneration cycle
- Built to offer top quality at the right price
- Twin traffic lights give indication of machine status
- Three standard cycle options plus special applications cycle
- Increased useable height on all models
- Automatic self-cleaning cycle on all models
- Both detergent and rinse aid dosed by reliable peristaltic pumps
- Selectable energy saving mode
- All models with operational self diagnostics
- Drain pump optional on all models
- All models supplied with two racks – C501, C505WS – two open style racks
- Above can be supplied with one open and one plate if specified
- C511 – one plate and one open rack
- Scrap trays as standard on all models
- Partial double skin for noise and heat loss reduction

Technical

- Standard voltage 240V – single phase
- All C500 models can be supplied for 3 phase
- Suitable for hot (max 50°C) or cold* water supply at 2 to 4 bar dynamic supply pressure
- Wash temperature 60°C (adjustable)
- Rinse temperature C501 & C505WS 65°C (adjustable)
- Rinse temperature C511 78°C (adjustable)

*Cold water supply will extend wash cycle times during busy periods

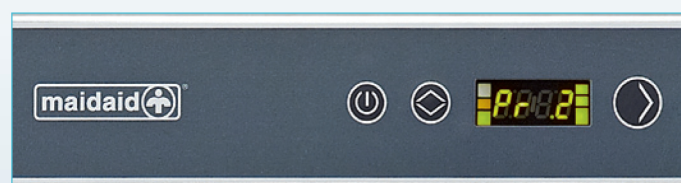

Model	Rack size mm	Useable Height mm	Dimensions mm W x D x H	Cycle Time Sec	Power kW	Amps Required
C501	500	320	580 x 610 x 815#	70-110-150	2.6/4.5/6.5	13/20/30##
C501D	As C501 above but includes fitted drain pump					
C505WS	500	320	580 x 610 x 815#	80-120-150	2.6/4.5/6.5	13/20/30##
C505WSD	As C505WS above but includes fitted drain pump					
C511	500	320	580 x 610 x 815#	70-120-150	2.6/4.5/6.5	13/20/30##
C511D	As C511 above but includes fitted drain pump					

Height excludes feet which will add 10 to 20mm.

Machines will be supplied for 30 amp supply as standard, if 13 or 20 amp ordered they will be supplied with original cable and without plug. Standard 13 amp UK 3 pin plugs will be **unsuitable** for cable supplied.

Ancillary†	Variants	Part No.
Scrap tray	Set of scrap trays for C501 and C505WS	MH105001B
Water softener-manual	Manual regeneration 8 litre	Q900008B
Water softener-manual	Manual regeneration 12 litre	Q900012B
Water softener-auto	Automatic regeneration – COLD water (5°C to 40°C)	Q900100B
Water softener-auto	Automatic regeneration – HOT water (5°C to 65°C)	Q900105B
Booster pump	Externally fitted water supply pressure booster pump (water temperature not to exceed 50°C)	Q904008B
Machine stands-black	Black paint finish adjustable machine stand – 520mm tall	Q902100B
Machine stands-S/S	Stainless steel adjustable machine stand – 520mm tall	Q902101B
Machine stands-chrome	Chrome finish adjustable machine stand – 520mm tall	Q902104B
Additional racks	Open glass/cup rack – plastic	Z972001
Additional racks	Useful plate pegged rack – plastic	Z972003
Cutlery rack	Eight section cutlery rack insert for 500mm racks	Z972032

† Please see pages 22 and 46 for images and fuller specification.